


**ACCIAIO / ACCIAIO - Testa Tonda**  
**STEEL / STEEL - Dome Head**

**H-Lock**  
**H-Lock**

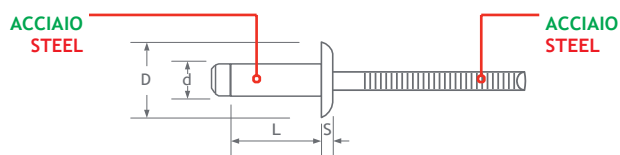

| d<br>mm.   | L<br>mm. | Codice<br>Code | mm.        | mm.   | D<br>mm. | s<br>mm. | N    | N    |       |
|------------|----------|----------------|------------|-------|----------|----------|------|------|-------|
| <b>4,8</b> | 9        | BR0554890      | 1,5 - 3,5  | ø 5,0 | 9,5      | 2,4      | 3800 | 5700 | 4.000 |
|            | 11,5     | BR05548115     | 3,5 - 6,0  |       |          |          |      |      | 4.000 |
|            | 14       | BR0554814      | 6,0 - 8,5  |       |          |          |      |      | 3.500 |
|            | 16,5     | BR05548165     | 8,5 - 11,0 |       |          |          |      |      | 3.000 |

| d<br>mm.   | L<br>mm. | Codice<br>Code | mm.         | mm.         | D<br>mm. | s<br>mm. | N    | N    |       |
|------------|----------|----------------|-------------|-------------|----------|----------|------|------|-------|
| <b>6,4</b> | 10,5     | BR05564105     | 2,8 - 4,8   | ø6,7 - ø6,9 | 12,8     | 2,9      | 6500 | 9000 | 2.000 |
|            | 12,5     | BR05564125     | 4,8 - 6,8   |             |          |          |      |      | 2.000 |
|            | 14,5     | BR05564145     | 6,8 - 8,8   |             |          |          |      |      | 1.500 |
|            | 16,5     | BR05564165     | 8,8 - 10,8  |             |          |          |      |      | 1.500 |
|            | 18,5     | BR05564185     | 10,8 - 12,8 |             |          |          |      |      | 1.500 |
|            | 20,5     | BR05564205     | 12,8 - 14,8 |             |          |          |      |      | 1.000 |

H-LOCK disponibili anche nelle versioni: ALLUMINIO/ALLUMINIO e INOX/INOX.  
H-LOCK is also available in: ALU/ALU and STAINLESS STEEL A/2 - STAINLESS STEEL A/2 version.